




ERS-301

ASPHALT PRIMER

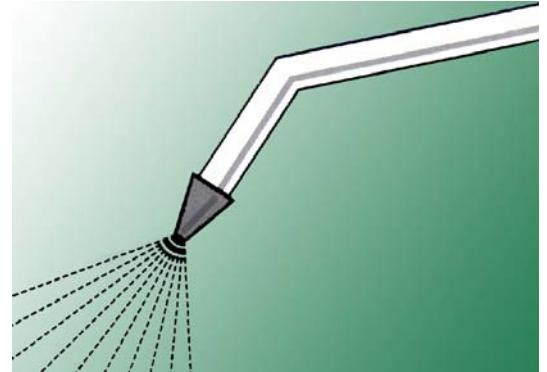

QUICK-DRYING ASPHALT PRIMER

NON-FIBRATED PENETRATING ROOF PRIMER

Ecology's ERS-301 Asphalt Primer is a versatile, non-fibrated, quick-drying, asphalt-based roof primer. It is used to provide increased adhesion over a variety of low-tack or slightly contaminated surfaces where asphalt roof mastics, roof elastomers, protective/reflective coatings, modified bitumen membranes, or self-adhered, single-ply membranes are to be applied. ERS-301 is formulated with the finest roofing asphalts and petroleum solvents to provide unsurpassed penetration. ERS-301 is quick drying, asbestos free; with a VOC approved formulation, that meets most present environmental safety standards.

ERS-301 Asphalt Primer also meets or exceeds Federal Specification SS-A-701B.

QUICK APPLICATION

ERS-301 can be applied to a clean, dry surface by brush, roller, or spray application. Coverage rates will vary with the porosity of the surface and the roughness of the substrate it is applied over. ERS-301 should be allowed to dry tack-free before applying additional repair materials, roof coatings, or roof membranes.

GENERAL DATA

Color:	Black	
Application Rate:	Smooth Surface:	Approx. 1/2 - 3/4 gal. per 100 sq. ft.
	Rough Surface:	Approx. 3/4 - 1 gal. per 100 sq. ft.
Container Sizes:	5 gal	
Weight:	48 lbs	
Pallet Size:	36 pails	



Ecology Roof Systems®

Corporate Offices
 1400 Harbor Blvd. Suite #601, Fullerton, CA 92835
 PHONE: 800 553-3833 FAX: 714 526-1034
www.ecologyroof.com