




PRODUCTS FOR OUR ENVIRONMENT

TECHNICAL DATA SHEET

ERS-8006

P/N: 035-0080

For Professional Use Only

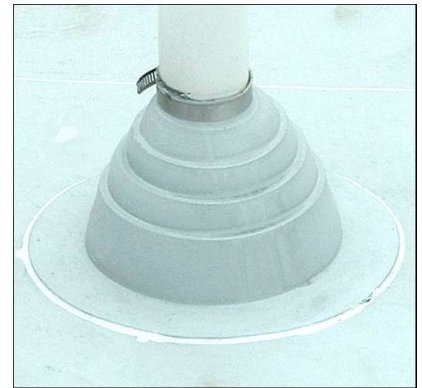

PRODUCT DESCRIPTION:

ERS-8006 is prefabricated for quick and easy pipe flashing installations. ERS-8006 can be cut to fit various dimensions of 1" to 4 1/2" in diameter. ERS-8006 is installed by the hot-air welding procedure. ERS-8006 facilitates labor savings and ensures a quality installation.

PHYSICAL PROPERTIES:

Property	Test Procedure	Physical Properties
Color		White
Size		7" in height / Fits diameters up to 4 1/2"
Thickness	ASTM D638	.125" Nominal
Specific Gravity	ASTM D792	1.32g/cm ³
Tensile Strength	ASTM D638	>2500 PSI
Elongation	ASTM D638	>300
Heat Aging	ASTM D3045	90% of Original
Cold Resistance	ASTM D1043	-40°F
Water Vapor Permeability	ASTM E96	2.8g/m ² /day
Dimensional Stability	ASTM D1240	0.5% or less
U.V. Stability	Xenon Arc 150	10,000 hrs. (Excellent)

Ecology Roof Systems®

Corporate Offices

9821 Olde Eight Road, Unit F, Northfield, OH 44067

PHONE: 330-467-4220 FAX: 330-467-4225

www.ecologyroof.com

REGIONAL OFFICES LOCATED ACROSS THE U.S.

To the best of our knowledge, all technical data contained herein is true and accurate as of the date of issuance and subject to change without prior notice. User must contact Ecology Roof Systems to verify correctness before specifying or ordering. We guarantee our products to conform to the quality control standards established by Ecology Roof Systems. We assume no responsibility for coverage, performance or injuries resulting from use. Liability, if any is limited to replacement of the product. NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY ECOLOGY ROOF SYSTEMS, EXPRESSED OR IMPLIED, STATUTORY, BY OPERATION OF LAW, OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.