



PRODUCTS FOR OUR ENVIRONMENT


**TECHNICAL DATA SHEET**

**ERS-Term Bar Flat  
ERS-Term Bar w/ Lip**

P/N: 035-0150

P/N: 035-0155

For Professional Use Only

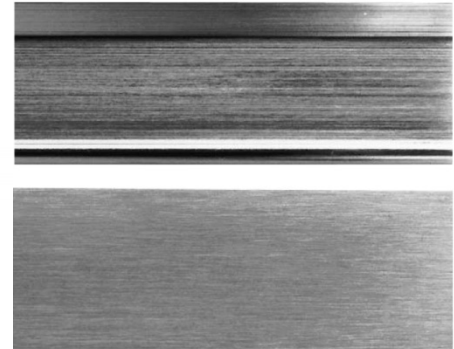

**PRODUCT DESCRIPTION:**

The ERS-Term Bar Flat and w/Lip are designed to terminate single-ply membranes to parapet walls and other penetrations. Use Ecology Roof Systems recommended fasteners to secure the termination bar.

The ERS-Term Bar Flat and w/Lip is made of extruded aluminum (6063 T6 alloy) with a mill finish. Oval holes that measure 1/4" x 3/8" are punched into each bar, with a standard spacing of 6", 8" or 12" on center (O.C.). Flex Termination Bar can be made to order with special hole spacing.

**PACKAGING**

- Each length of termination bar measures 10'.
- There are 50 lengths of bar in each tube (500' total).
- Pallet quantities equal 5,000' (10 tubes).

**PHYSICAL DATA:**

Flat Bar	
Width	1"
Thickness	0.090"
Shipping Weight	57 lbs/tube"
Lip Bar	
Width	0.75"
Thickness	0.090"
Lip Width	0.1875
Lip Angle	45°
Shipping Weight	57 lbs/tube

**Ecology Roof Systems®**

Corporate Offices

9821 Olde Eight Road, Unit F, Northfield, OH 44067

PHONE: 330-467-4220 FAX: 330-467-4225

www.ecologyroof.com

REGIONAL OFFICES LOCATED ACROSS THE U.S.

To the best of our knowledge, all technical data contained herein is true and accurate as of the date of issuance and subject to change without prior notice. User must contact Ecology Roof Systems to verify correctness before specifying or ordering. We guarantee our products to conform to the quality control standards established by Ecology Roof Systems. We assume no responsibility for coverage, performance or injuries resulting from use. Liability, if any is limited to replacement of the product. NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY ECOLOGY ROOF SYSTEMS, EXPRESSED OR IMPLIED, STATUTORY, BY OPERATION OF LAW, OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.